

# 0970-003 FACT SHEET

- The hand operated double acting stirrup pump can be used to pump fluids from a wide range of buckets, containers and barrels.
- Design Features a support leg and foot plate allowing the user to quickly secure the pump with one foot so that it may be operated with two hands.
- Exterior dimensions: 800mm x 270mm x 260mm.
- Output hose tail to fit a 3/8 inch internal bore rubber hose secured using an adjustable worm-drive clip.
- Incorporating precision machined brass components, stainless ball valves, polymer – composite valve gear and synthetic seals.


(Please contact us for further information on chemical compatibility with any particularly volatile chemicals.)

Suitable for a variety of applications including the following:

1. Agricultural Spraying using an appropriate hose attachment.
2. Decanting from large containers at a rate of up to 8 Litres per minute.
3. Pumping fluid to a head of over 30 ft. (H<sub>2</sub>O) or a pressure of up to 200 bar.

FOOT PLATE

HOSE TAIL

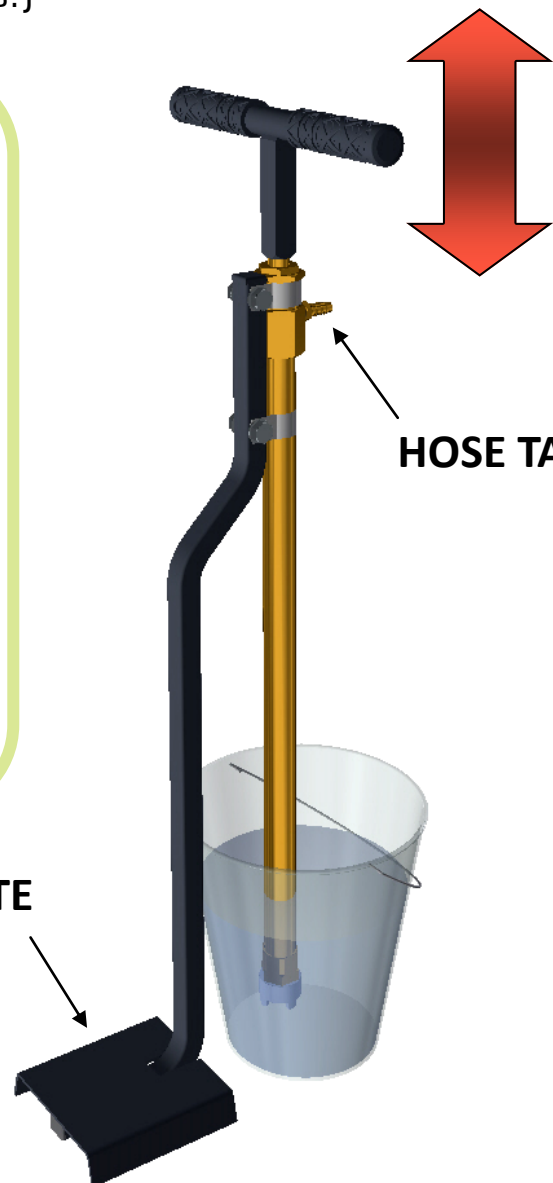

ERNEST H. HILL LTD • SHEFFIELD  
[www.hillpumps.com](http://www.hillpumps.com)